

UNCLASSIFIED

WEIDLINGER ASSOCIATES NEW YORK F/8
TRANSIENT RESPONSE OF STRUCTURES BY USE OF COMPONENT MODES.(U)
FEB 78 J M KLOSNER, D RANLET N00014-72-C-0119
TR-22 NL

NL


| OF |

AD
A059002

END
DATE
FILMED

11-78

DDC



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

DDC FILE COPY

AD A0 59002

Paul
LEVEL II

(3)

✓ WEIDLINGER ASSOCIATES, CONSULTING ENGINEERS

373050
110 EAST 59TH STREET
NEW YORK, NEW YORK 10022

9 Technical rept.

14 TR-22

6 TRANSIENT RESPONSE OF STRUCTURES
BY USE OF COMPONENT MODES

by

10 J. M. Klosner ~~and~~ D. Ranlet

12 46p.

OFFICE OF NAVAL RESEARCH

15
Contract No. ~~N00014-72-C-0119~~ ✓
Technical Report No. 22

11 FEB ~~1978~~ 78

Approved for public release; distribution unlimited.

DDC
RECEIVED
SEP 25 1978
D

ACCESSION for	
DTIC	White Section <input checked="" type="checkbox"/>
DDC	Buff Section <input type="checkbox"/>
UNANNOUNCED	<input type="checkbox"/>
JUSTIFICATION.....	
BY.....	
REMARKS/AVAILABILITY CODES	
DATE ACQ/SPECIAL	
A	

373 050

Lee

ABSTRACT

A general method is presented for obtaining the dynamic equations of an elastic structure to which elastic and/or nonlinear substructural elements are attached.

TABLE OF CONTENTS

	<u>Page</u>
I INTRODUCTION	1
II GENERAL METHOD	3
III ILLUSTRATIVE PROBLEMS.	11
REFERENCES.	19
APPENDIX A	20

I INTRODUCTION

Component mode methods had been successfully exploited to solve vibration problems long before the computer age made it feasible to analyze complex structural systems by discretization, e.g., the finite element method.

While analytical solutions abound in the literature, the structures considered, out of necessity, are comparatively simple, and are analyzed on an ad hoc basis. The extensive use of finite element methods has made it feasible to consider the most complex structural systems, and thereby made it necessary to develop comprehensive procedures for obtaining the dynamic equations for the system.

Various methods for component mode analysis have been suggested [1, 2, 3]. They differ from one another in their choice of component modes, but all express the equations of motion in terms of system modal stiffness and mass matrices and component mode coordinates. Their concern is essentially directed toward solving the eigenvalue problem and determining the system modes.

In a previous report [4] a general method was presented for obtaining the dynamic equations of an elastic structure to which arbitrary elastic substructural elements are attached. The methodology used was to express the kinetic and potential energies of the system as the sum of the contributions from the main structure and substructures, separately. It was shown that the equations of motion of the main structure were affected by the presence of the attached structure by means of the forces exerted at points of attachment.

It is the purpose of this report to formalize and fully automate the procedure, and to extend it so that it can be applied to the most complex structural elastic systems having nonlinear attachments and/or small substructural regions that respond nonlinearly. A treatment of some special cases involving nonlinear attachments may be found in [5].

II GENERAL METHOD

Consider an elastic structure S to which an elastic substructure σ is attached. We denote the in vacuo modal and diagonal generalized mass matrices of S by ϕ_S , μ_S , respectively, and the corresponding diagonal frequency matrix by ω_S^2 , and express the displacement of the structure as

$$d_S = \phi_S q_S \quad (1)$$

where q_S is the generalized coordinate vector.

The kinetic and potential energies of the system, expressed as sums of contributions from S and σ separately, are

$$T(\dot{q}_S, \dot{d}_\sigma) = \frac{1}{2} \dot{q}_S^T \mu_S \dot{q}_S + \frac{1}{2} \dot{d}_\sigma^T M_\sigma \dot{d}_\sigma \quad (2)$$

$$V(q_S, d_\sigma) = \frac{1}{2} q_S^T \mu_S \omega_S^2 q_S + \frac{1}{2} d_\sigma^T K_\sigma d_\sigma \quad (3)$$

where M_σ and K_σ are the mass and stiffness matrices of the substructure, and d_σ is the σ -displacement vector.

Let the constrained base modes T_i^C be defined as the static elastic and rigid body displacements of σ due to successive unit displacements of the constrained degrees-of-freedom (dof) (i.e., those interface coordinates of σ which are constrained to move with S). Define the fixed-base modes $\phi_{f\sigma}$ as the modes of σ obtained when the constrained dof are held fixed.

The displacement of the substructure is expressed as a superposition of its static response due to movement of its constrained degrees of freedom and its motion relative to them:

$$d_\sigma = d_{c\sigma} + d_{f\sigma} \quad (4)$$

This can be expressed in a most convenient compact form [3] as

$$\begin{bmatrix} \bar{d}_\sigma \\ \hat{d}_\sigma \end{bmatrix} = \begin{bmatrix} \bar{\phi}_S & 0 \\ T^c \bar{\phi}_S & \hat{\phi}_{f\sigma} \end{bmatrix} \begin{bmatrix} q_S \\ q_{f\sigma} \end{bmatrix} \quad (5)$$

where $(\bar{})$ and $(\hat{})$ refer, respectively, to the constrained and unconstrained dof; T^c is the constrained base mode matrix whose successive columns are the constrained base mode vectors; $q_{f\sigma}$ represents the fixed-base generalized coordinate vector.

For convenience we express the displacement of Eq. (5) as:

$$d_\sigma = T^{c*} \bar{\phi}_S q_S + \phi_{f\sigma} q_{f\sigma} \quad (6)$$

where

$$T^{c*} = \begin{bmatrix} I \\ T^c \end{bmatrix} \quad (7)$$

and

$$\phi_{f\sigma} = \begin{bmatrix} 0 \\ \hat{\phi}_{f\sigma} \end{bmatrix} \quad (8)$$

Lagrange's equations for S are

$$\frac{d}{dt} \left(\frac{\partial T}{\partial \dot{q}_S} \right) + \frac{\partial V}{\partial q_S} = Q_S \quad (9)$$

where Q_S are the generalized forces due to external forces. Substituting Eqs. (2) and (3) into (9) then yields

$$\mu_S \ddot{q}_S + \mu_S \omega_S^2 q_S + \frac{\partial d_\sigma^T}{\partial q_S} M_\sigma \ddot{d}_\sigma + \frac{\partial d_\sigma^T}{\partial q_S} K_\sigma d_\sigma = Q_S \quad (10)$$

But from Eqs. (6)

$$\frac{\partial d_\sigma^T}{\partial q_S} = \frac{\partial \dot{d}_\sigma^T}{\partial \dot{q}_S} = \bar{\phi}_S^T T^{c*T} \quad (11)$$

and thus Eq. (10) can be written as

$$\mu_S \ddot{q}_S + \mu_S \omega_S^2 q_S + \bar{\phi}_S^T T^{c*T} (M_\sigma \ddot{d}_\sigma + K_\sigma d_\sigma) = Q_S \quad (12)$$

Similarly by applying Lagrange's equations to the substructure we obtain

$$M_\sigma \ddot{d}_\sigma + K_\sigma d_\sigma = F \quad (13)$$

If we make the assumption that no external forces are applied to the substructure, the force vector F vanishes everywhere except at the constrained dof. Thus

$$F = \begin{Bmatrix} \bar{F} \\ 0 \end{Bmatrix} \quad (14)$$

where \bar{F} are the interaction forces exerted on σ at the constraints.

Note that no difficulties arise when external forces applied to the substructure are included (see Appendix A).

Upon substituting Eqs. (7), (13) and (14) into (12), we can write the equations of motion for the main structure as

$$\mu_S \ddot{q}_S + \mu_S \omega_S^2 q_S + \bar{\phi}_S^T \bar{F} = Q_S \quad (15)$$

The equations for the substructure (13) can, by substituting Eqs. (6-8, 14), be recast as

$$\bar{m}_\sigma \bar{\phi}_S \ddot{q}_S + (\bar{k}_\sigma + \bar{k}_\sigma^T T^c) \bar{\phi}_S q_S + \bar{k}_\sigma \hat{\phi}_{f\sigma} q_{f\sigma} = \bar{F} \quad (16)$$

$$\hat{m}_\sigma \hat{\phi}_{f\sigma} \ddot{q}_{f\sigma} + \hat{k}_\sigma \hat{\phi}_{f\sigma} q_{f\sigma} + \hat{m}_\sigma T^c \bar{\phi}_S \ddot{q}_S + (\hat{k}_\sigma + \hat{k}_\sigma T^c) \bar{\phi}_S q_S = 0 \quad (17)$$

where m , k are the elements of the partitioned mass (assuming a lumped mass approximation) and stiffness matrices:

$$M_{\sigma} = \begin{bmatrix} \bar{m}_{\sigma} & 0 \\ 0 & \hat{m}_{\sigma} \end{bmatrix}; \quad K_{\sigma} = \begin{bmatrix} \bar{k}_{\sigma} & \hat{k}_{\sigma} \\ \hat{k}_{\sigma} & \bar{k}_{\sigma} \end{bmatrix} \quad (18)$$

By the very definition of the constrained base modes [3] it follows that


$$(\hat{k}_{\sigma} + \hat{k}_{\sigma}^T) \bar{\phi}_S q_S \equiv 0 \quad (19)$$

Consequently, upon pre-multiplying Eq. (17) by $\hat{\phi}_{f\sigma}^T$, we have

$$\mu_{f\sigma} \ddot{q}_{f\sigma} + \mu_{f\sigma} \omega_{f\sigma}^2 q_{f\sigma} + \hat{\phi}_{f\sigma}^T (\hat{m}_{\sigma}^T \bar{\phi}_S \ddot{q}_S) = 0 \quad (20)$$

where $\mu_{f\sigma}$ and $\omega_{f\sigma}$ represent, respectively, the generalized mass and frequency matrices of σ .

In summary, the dynamics of the system is expressed by Eqs. (15) and (20), where \bar{F} , the interaction force vector is given by Eq. (16). Note that the first term of Eq. (16) is that due to the inertia of the mass of σ located at the constrained dof, while the remainder of the expression is due to the stiffness forces exerted by σ (see figure below).

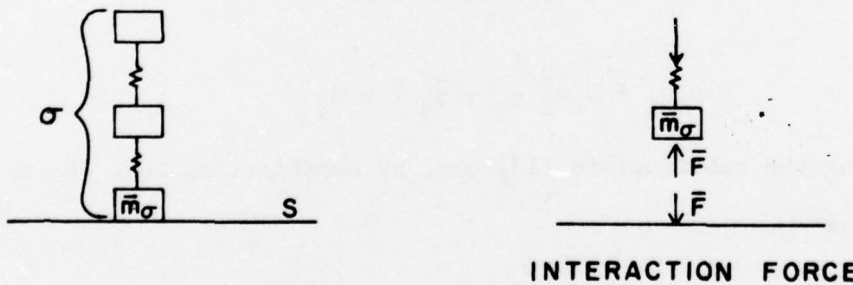

There are a number of advantages in considering the main structure separately, and accounting for the substructure by means of the constraint forces. First, the computer core (central memory) required to solve a given problem is reduced, since no total system modal stiffness matrix is needed. Second, once the constraint modes have been determined, only those rows of K_{σ} (the unconstrained stiffness matrix of σ) that correspond

to the constrained physical degrees of freedom of σ are required in the solution. This also reduces memory requirements. Third, the amount of computer time (central processor time) required to set up the matrices in the equation of motion is reduced, as compared to that required by a method employing a system modal stiffness matrix. Referring to the method of Ref. [3], for example, the system modal stiffness matrix is determined by the second of Eqs. (A-2). The computer time needed to evaluate this matrix may be excessive, especially if the problem under consideration requires many modes and/or physical degrees of freedom, and if K_σ is not well banded. In fact, the rearrangement of physical degrees of freedom of σ to partition K_σ usually results in a poorly banded matrix. Similar difficulties with the first of Eqs. (A-2) may be avoided by using a lumped mass approximation for σ .

In view of the above, the method developed here allows one to more readily handle complex systems with many substructures within the restrictions imposed by a given size of central memory.

FREE-FREE MODES OF SUBSTRUCTURE

The displacement of the substructure, expressed in terms of its free-free modes ϕ_σ , is:

$$\begin{bmatrix} \bar{d}_\sigma \\ \hat{d}_\sigma \end{bmatrix} = \begin{bmatrix} \bar{\phi}_S & 0 \\ 0 & \hat{\phi}_\sigma \end{bmatrix} \begin{bmatrix} q_S \\ q_\sigma \end{bmatrix} \quad (21)$$

since

$$\phi_\sigma = \begin{bmatrix} \bar{\phi}_\sigma \\ \hat{\phi}_\sigma \end{bmatrix} \text{ and } \bar{d}_\sigma = \bar{\phi}_\sigma q_\sigma = \bar{\phi}_S q_S \quad (22)$$

Proceeding as before, we obtain the following set of equations in lieu of Eqs. (16) and (17).

$$\bar{m}_\sigma \bar{\phi}_\sigma \ddot{q}_\sigma + \bar{k}_\sigma \bar{\phi}_\sigma q_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma q_\sigma = \bar{F} \quad (23)$$

$$\hat{m}_\sigma \hat{\phi}_\sigma \ddot{q}_\sigma + \hat{k}_\sigma \bar{\phi}_\sigma q_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma q_\sigma = 0 \quad (24)$$

The generalized mass (μ_σ) and frequency (ω_σ) matrices for the free-free modes of the substructure are

$$\begin{aligned} \mu_\sigma &= \phi_\sigma^T M_\sigma \phi_\sigma = \bar{\phi}_\sigma^T \bar{m}_\sigma \bar{\phi}_\sigma + \hat{\phi}_\sigma^T \hat{m}_\sigma \hat{\phi}_\sigma \\ \mu_\sigma \omega_\sigma^2 &= \phi_\sigma^T K_\sigma \phi_\sigma = \bar{\phi}_\sigma^T (\bar{k}_\sigma \bar{\phi}_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma) + \hat{\phi}_\sigma^T (\bar{k}_\sigma \bar{\phi}_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma) \end{aligned} \quad (25)$$

If we now pre-multiply Eq. (24) by ϕ_σ^T , and make use of the expressions in Eq. (25), then the following is obtained

$$\mu_\sigma \ddot{q}_\sigma + \mu_\sigma \omega_\sigma^2 q_\sigma - \bar{\phi}_\sigma^T [\bar{m}_\sigma \bar{\phi}_\sigma \ddot{q}_\sigma + (\bar{k}_\sigma \bar{\phi}_\sigma q_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma q_\sigma)] = 0 \quad (26)$$

The motion of the main structure is determined by Eq. (15), which when combined with Eq. (23) becomes

$$\mu_S \ddot{q}_S + \mu_S \omega_S^2 q_S + \bar{\phi}_S^T [\bar{m}_\sigma \bar{\phi}_\sigma \ddot{q}_\sigma + (\bar{k}_\sigma \bar{\phi}_\sigma q_\sigma + \hat{k}_\sigma \hat{\phi}_\sigma q_\sigma)] = Q_S \quad (27)$$

Thus, when free-free modes of the substructure are used, Eqs. (26) and (27) express the motion of the system. Note that the bracketed terms in (26) and (27) represent the constraint interaction forces, and that the motion of the substructure, Eq. (26), is coupled to that of the main structure through the enforcement of the constrained dof relationship, Eq. (22).

NONLINEAR ATTACHMENTS

Consider a composite structural system in which each of the components is assumed to exhibit a linear elastic response, and in which the components are attached by nonlinear mountings. We denote the force-displacement relationships of the mountings by $\bar{F}(\delta, \dot{\delta})$, where δ is the relative interface displacement vector

$$\delta = \bar{d}_S - \bar{d}_\sigma \quad (28)$$

When component mode analysis is to be applied, it is necessary to isolate these attachments from all of the components, so that only the forces transmitted by them enter into the analysis.

FIXED-BASE MODES. The displacements of σ are expressed as

$$\begin{Bmatrix} \bar{d}_\sigma \\ \hat{d}_\sigma \end{Bmatrix} = \begin{bmatrix} \bar{\phi}_S & | & 0 \\ T^C \bar{\phi}_S & | & \hat{\phi}_{f\sigma} \end{bmatrix} \begin{Bmatrix} q_S \\ q_{f\sigma} \end{Bmatrix} - \begin{Bmatrix} \delta \\ T^C \delta \end{Bmatrix} \quad (29)$$

When determining the fixed-base modes of σ , it should be noted that the constrained dof must include those which are constrained by the nonlinear attachments.

Upon combining Eqs. (13), (14) and (29), we obtain the following equations for the substructure:

$$\bar{F} = \bar{m}_\sigma (\bar{\phi}_S \ddot{q}_S - \ddot{\delta}) + (\bar{k}_\sigma + \bar{k}_\sigma T^C) (\bar{\phi}_S q_S - \delta) + \bar{k}_\sigma \hat{\phi}_{f\sigma} q_{f\sigma} \quad (30)$$

and

$$\mu_{f\sigma} \ddot{q}_{f\sigma} + \mu_{f\sigma} \omega_{f\sigma}^2 q_{f\sigma} + \hat{\phi}_{f\sigma}^T \bar{m}_\sigma T^C (\bar{\phi}_S \ddot{q}_S - \ddot{\delta}) = 0 \quad (31)$$

The nonlinear constraint forces are

$$\bar{F} = \bar{F}(\delta, \dot{\delta}) \quad (32)$$

Thus the system dynamics is expressed by Eqs. (30), (31), (32) and (15).

FREE-FREE MODES. When free-free component modes are used, we express the displacements as

$$\begin{Bmatrix} \bar{d}_\sigma \\ \hat{d}_\sigma \end{Bmatrix} = \begin{bmatrix} \bar{\phi}_S & | & 0 \\ 0 & | & \hat{\phi}_\sigma \end{bmatrix} \begin{Bmatrix} q_S \\ q_\sigma \end{Bmatrix} - \begin{Bmatrix} \delta \\ 0 \end{Bmatrix} \quad (33)$$

Utilizing Eq. (33) and proceeding as before, we obtain

$$\bar{F} = \bar{m}_\sigma (\bar{\phi}_S \ddot{q}_S - \ddot{\delta}) + \bar{k}_\sigma (\bar{\phi}_S q_S - \delta) + \hat{\bar{k}}_\sigma \hat{\phi}_\sigma q_\sigma \quad (34)$$

$$\mu_\sigma \ddot{q}_\sigma + \mu_\sigma \omega_\sigma^2 q_\sigma = \bar{\phi}_\sigma^T [\bar{m}_\sigma (\bar{\phi}_S \ddot{q}_S - \ddot{\delta}) + \bar{k}_\sigma (\bar{\phi}_S q_S - \delta) + \hat{\bar{k}}_\sigma \hat{\phi}_\sigma q_\sigma] \quad (35)$$

The substitution of Eq. (34) into (35) results in

$$\mu_\sigma \ddot{q}_\sigma + \mu_\sigma \omega_\sigma^2 q_\sigma = \bar{\phi}_\sigma^T \bar{F}(\delta, \dot{\delta}) \quad (36)$$

where

$$\delta = \bar{\phi}_S q_S - \bar{\phi}_\sigma q_\sigma \quad (37)$$

Equations (15), (32), (34) and (36) characterize the dynamics of the system when free-free modes are used.

One might, upon juxtaposing Eqs. (15), (30) and (31) and Eqs. (15), (34) and (36), arrive at the conclusion that, where nonlinear attachments are to be considered, it is more convenient to use the free-free modes of the substructure. Certainly, their use eliminates the need to store any of the mass and stiffness elements of component σ , as would be the case when fixed-base modes are used. Also, only two coupled systems of equations result when they are used. However, these advantages can readily be offset by the need to use a far greater number of free-free modes than would be required when fixed-base modes are used. For example, for rather stiff mountings, fewer fixed-base modes would be required.

III ILLUSTRATIVE PROBLEMS

A. Two-Degree-of-Freedom System - Linear Springs

(i) Fixed-Base Modes

$$K_{\sigma} = \begin{bmatrix} k_2 & -k_2 \\ -k_2 & k_2 \end{bmatrix}; M_{\sigma} = \begin{bmatrix} 0 & 0 \\ 0 & m_2 \end{bmatrix}$$

and thus

$$\bar{k}_{\sigma} = k_2; \hat{\bar{k}}_{\sigma} = \hat{k}_{\sigma} = -k_2; \hat{k}_{\sigma} = k_2$$

$$\bar{m}_{\sigma} = 0; \hat{m}_{\sigma} = m_2$$

$$T^c = 1; \hat{\phi}_{f\sigma} = 1; \mu_{f\sigma} = m_2; \omega_{f\sigma}^2 = k_2/m_2$$

Upon substituting into Eq. (20), we obtain the equation of motion for σ :

$$m_2 \ddot{q}_{f\sigma} + k_2 q_{f\sigma} + m_2 \ddot{q}_S = 0 \quad (i)$$

But from Eq. (5): $\hat{d}_{\sigma} = q_S + q_{f\sigma}$, and thus

$$m_2 \ddot{\hat{d}}_{\sigma} + k_2 (\hat{d}_{\sigma} - \bar{d}_S) = 0 \quad (i')$$

For the main structure



$$\mu_S = m_1; \omega_S^2 = k_1/m_1; \bar{\phi}_S = 1$$

and thus Eqs. (15) and (16) yield:

$$m_1 \ddot{q}_S + k_1 q_S - k_2 q_{f\sigma} = f_S \quad (ii)$$

or

$$m_1 \ddot{\bar{d}}_S + k_1 \bar{d}_S - k_2 (\hat{d}_{\sigma} - \bar{d}_S) = f_S \quad (ii')$$

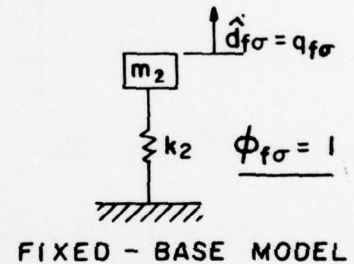

(ii) Free-Free Component Modes^{*)}


$$\bar{k}_\sigma = k_2; \quad \bar{\hat{k}}_\sigma = \hat{k}_\sigma = -k_2; \quad \hat{k}_\sigma = k_2;$$

$$\bar{m}_\sigma = 0; \quad \hat{m}_\sigma = m_2;$$

$$\phi_\sigma = \begin{bmatrix} 1 & 1 \\ 1 & 0 \end{bmatrix}; \quad \omega_{\sigma 1} = 0; \quad \omega_{\sigma 2} = \infty;$$

$$\mu_\sigma = \begin{bmatrix} m_2 & 0 \\ 0 & 0 \end{bmatrix};$$

$$\mu_\sigma \omega_\sigma^2 = \phi_\sigma^T K_\sigma \phi_\sigma = \begin{bmatrix} 0 & 0 \\ 0 & k_2 \end{bmatrix}, \quad \mu_s = m_1; \quad \omega_s^2 = k_1/m_1; \quad \bar{\phi}_s = 1$$

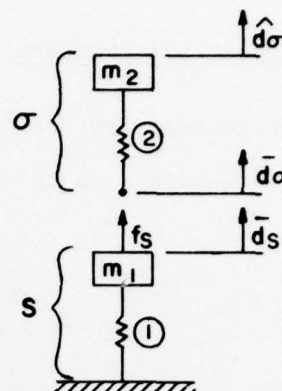

From Eqs. (21) and (22),

$$\bar{d}_\sigma = \bar{d}_s = \bar{\phi}_\sigma q_\sigma = \bar{\phi}_s q_s; \quad \hat{d}_\sigma = \hat{\phi}_\sigma q_\sigma$$

and thus,

$$\bar{d}_\sigma = q_{\sigma 1} + q_{\sigma 2}; \quad \hat{d}_\sigma = q_{\sigma 1}$$

Consequently, Eqs. (26) and (27) yield:

$$m_2 \ddot{d}_\sigma = k_2 (\bar{d}_\sigma - \hat{d}_\sigma) = 0 \quad (iii)$$

$$m_1 \ddot{\bar{d}}_\sigma + k_1 \bar{d}_\sigma + k_2 (\bar{d}_\sigma - \hat{d}_\sigma) = f_s \quad (iv)$$

^{*)} When determining the free-free modes of the σ -structure, one might, at first glance, conclude that the constrained dof need not be considered, since no mass is placed there. But the σ -structure has two degrees of freedom and thus two free-free component modes are required. The first of these is, of course, the rigid body mode which has a zero frequency; the second, which is not so apparent, is a mode in which the constrained dof oscillates with an infinite frequency, so that the unconstrained dof remains immobile. Alternately, one can, by placing a fictitious mass m at the constrained dof, determine the free-free modes in the limit as $m \rightarrow 0$.

B. Two-Degree-of-Freedom System - Nonlinear Spring

(i) Fixed-Base Modes

$$\bar{K}_\sigma = 0; \bar{m}_\sigma = \mu_{f\sigma} = m_2; \omega_{f\sigma}^2 = 0;$$

$$\hat{\phi}_{f\sigma} = 0; q_{f\sigma} = 0; T^c = 0;$$

$$\bar{\phi}_S = 1$$

From Eq. (29): $\bar{d}_\sigma = \bar{\phi}_S q_S - \delta; \hat{d}_\sigma = 0$

Substituting into Eqs. (15), (30), (32) and (31) we obtain


$$m_1 \ddot{\bar{d}}_S + k_1 \bar{d}_S + \bar{F} = f_S \quad (i)$$

$$\bar{F} = m_2 \ddot{\bar{d}}_\sigma \quad (ii)$$

$$0 = 0 \quad (iii)$$

where $\bar{F} = \bar{F}(\delta, \dot{\delta})$ and

$$\delta = \bar{d}_S - \bar{d}_\sigma$$

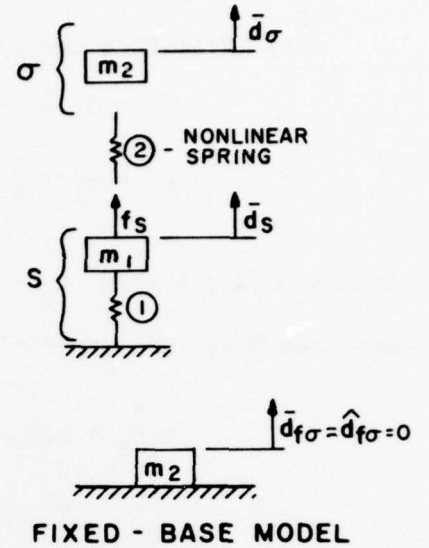

(ii) Free-Free Component Modes

$$K_{\sigma} = 0; \bar{m}_{\sigma} = \mu_{\sigma} = m_2; \omega_{\sigma}^2 = 0;$$

$$\mu_S = m_1; \omega_S^2 = k_1/m_1; \bar{\phi}_{\sigma} = 1; \hat{\phi}_{\sigma} = 0$$


Equation (22) yields: $\bar{d}_{\sigma} = q_{\sigma}$

and from Eqs. (15) and (36), we have

$$m_1 \ddot{\bar{d}}_S + k_1 \bar{d}_S + \bar{F} = f_S \quad (iv)$$

$$m_2 \ddot{\bar{d}}_{\sigma} - \bar{F} = 0 \quad (v)$$

$$\text{where } \bar{F} = \bar{F}(\delta, \dot{\delta}) \text{ and } \delta = \bar{d}_S - \bar{d}_{\sigma}$$

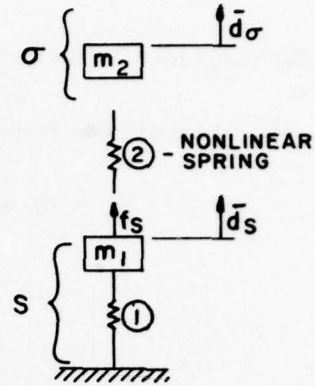

C. Simply Supported Beam and Spring Mass System - Linear Springs

(i) Fixed-Base Modes


$$K_{\sigma} = \begin{bmatrix} k_1 & -k_1 & 0 \\ -k_1 & (k_1 + k_2) & -k_2 \\ 0 & -k_2 & k_2 \end{bmatrix}, M_{\sigma} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & m_1 & 0 \\ 0 & 0 & m_2 \end{bmatrix}$$

$$\text{Let: } k_1 = 2k; k_2 = k; m_1 = 2m, m_2 = m$$

$$\text{Then: } \bar{k}_{\sigma} = 2k; \bar{\bar{k}}_{\sigma} = \begin{bmatrix} -2 & 0 \\ 0 & 1 \end{bmatrix} k$$

$$\hat{\bar{k}}_{\sigma} = \begin{bmatrix} -2 \\ 0 \end{bmatrix} k; \hat{k}_{\sigma} = \begin{bmatrix} 3 & -1 \\ -1 & 1 \end{bmatrix} k$$

$$\bar{m}_{\sigma} = 0; \hat{m}_{\sigma} = \begin{bmatrix} 2 & 0 \\ 0 & 1 \end{bmatrix} m$$

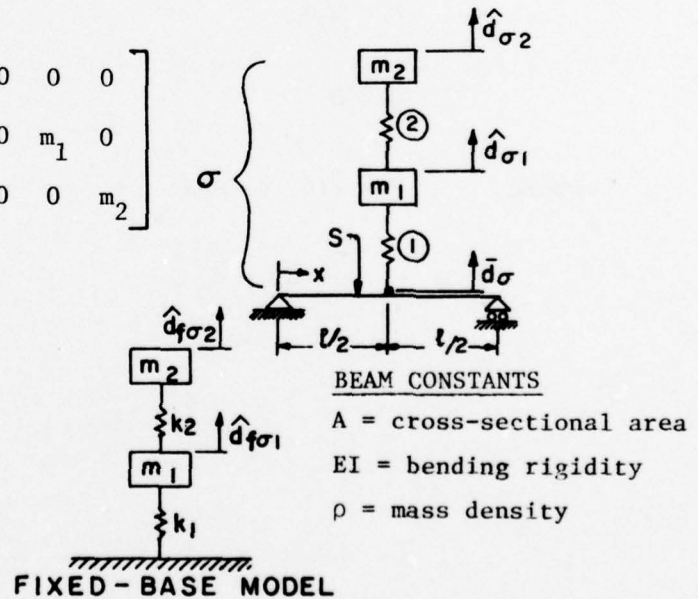

It can readily be shown that the fixed-base modal and frequency matrices

are:

$$\hat{\phi}_{f\sigma} = \begin{bmatrix} 1 & 1 \\ 2 & -1 \end{bmatrix}; \omega_{f\sigma}^2 = \begin{bmatrix} 1/2 & 0 \\ 0 & 2 \end{bmatrix} k/m$$

and that the constrained base mode matrix is:

$$T^c = \begin{Bmatrix} 1 \\ 1 \end{Bmatrix}$$

$$\text{Consequently, } \mu_{f\sigma} = \hat{\phi}_{f\sigma}^T \hat{m}_\sigma \hat{\phi}_{f\sigma} = \begin{bmatrix} 6 & 0 \\ 0 & 3 \end{bmatrix} m$$

For the main structure:

$$\mu_s = \frac{\rho A \ell}{2}; \quad \omega_s^2 = \frac{\pi^4 n^4}{\ell^4} \cdot \frac{EI}{\rho A}; \quad \phi_s q_s = \sum q_{sn} \sin \frac{n\pi x}{\ell}$$

Substitution into Eq. (20) yields:

$$\ddot{q}_{f\sigma 1} + \frac{1}{2} \frac{k}{m} q_{f\sigma 1} + \frac{2}{3} \sum \ddot{q}_{sn} \sin \frac{n\pi}{2} = 0 \quad (i)$$

$$\ddot{q}_{f\sigma 2} + 2 \frac{k}{m} q_{f\sigma 2} + \frac{1}{3} \sum \ddot{q}_{sn} \sin \frac{n\pi}{2} = 0 \quad (ii)$$

Now from Eq. (16): $F = -2k(q_{f\sigma 1} + q_{f\sigma 2})$

and from Eq. (15):

$$\ddot{q}_{sn} + \frac{\pi^4 n^4}{\ell^4} \cdot \frac{EI}{\rho A} q_{sn} + \frac{2}{\rho A \ell} \sin \frac{n\pi}{2} \left[-2k(q_{f\sigma 1} + q_{f\sigma 2}) \right] = Q_{sn} \quad (iii)$$

The following identities are established from Eq. (5):

$$\hat{d}_{\sigma 1} - \bar{d}_\sigma = q_{f\sigma 1} + q_{f\sigma 2}; \quad \hat{d}_{\sigma 2} - \bar{d}_\sigma = 2q_{f\sigma 1} - q_{f\sigma 2}$$

Thus (i) + (ii) and 2(i) - (ii) yield

$$2m\ddot{\hat{d}}_{\sigma 1} + 2k(\hat{d}_{\sigma 1} - \bar{d}_\sigma) + k(\hat{d}_{\sigma 1} - \hat{d}_{\sigma 2}) = 0 \quad (i')$$

$$m\ddot{\hat{d}}_{\sigma 2} + k(\hat{d}_{\sigma 2} - \hat{d}_{\sigma 1}) = 0 \quad (ii')$$

while (iii) can be written as

$$\ddot{q}_{Sn} + \frac{\pi^4 n^4}{l^4} \cdot \frac{EI}{\rho A} q_{Sn} + \frac{2}{\rho A l} \sin \frac{n\pi}{2} \left[-2k(\hat{d}_{\sigma 1} - \bar{d}_{\sigma}) \right] = Q_{Sn} \quad (iii')$$

where $\bar{d}_{\sigma} = \bar{d}_S = \int q_{Sn} \sin \frac{n\pi}{2}$


(ii) Free-Free Component Modes

The free-free component modal and frequency

matrices are:

$$\phi_{\sigma} = \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 0 \\ 1 & -2 & 0 \end{bmatrix}; \quad \omega_{\sigma}^2 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 3/2 & 0 \\ 0 & 0 & \infty \end{bmatrix} \text{ k/m};$$

$$\mu_{\sigma} = \begin{bmatrix} 3 & 0 & 0 \\ 0 & 6 & 0 \\ 0 & 0 & 0 \end{bmatrix}; \quad \mu_{\sigma} \omega_{\sigma}^2 = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 9 & 0 \\ 0 & 0 & 2 \end{bmatrix} \text{ k}$$

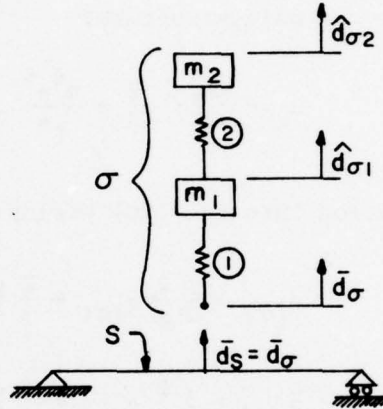

From Eq. (26)

$$\ddot{q}_{\sigma 1} - \frac{3}{2} \frac{k}{m} \left[\int q_{Sn} \sin \frac{n\pi}{2} - (q_{\sigma 1} + q_{\sigma 2}) \right] = 0 \quad (iv)$$

$$\ddot{q}_{\sigma 2} + \frac{3}{2} \frac{k}{m} q_{\sigma 2} - \frac{1}{3} \frac{k}{m} \left[\int q_{Sn} \sin \frac{n\pi}{2} - (q_{\sigma 1} + q_{\sigma 2}) \right] = 0 \quad (v)$$

Equation (27) yields:

$$\ddot{q}_{Sn} + \frac{\pi^4 n^4}{l^4} \cdot \frac{EI}{\rho A} q_{Sn} + \frac{2}{\rho A l} \sin \frac{n\pi}{2} \left[\int q_{Sn} \sin \frac{n\pi}{2} - (q_{\sigma 1} + q_{\sigma 2}) \right] = Q_{Sn} \quad (vi)$$

But from Eq. (21)

$$\hat{d}_{\sigma 1} = q_{\sigma 1} + q_{\sigma 2} \quad ; \quad \hat{d}_{\sigma 2} = q_{\sigma 1} - 2q_{\sigma 2}$$

and thus (iv) + (v) and (iv) - 2(v) yield

$$2m \ddot{\hat{d}}_{\sigma 1} + k(\hat{d}_{\sigma 1} - \hat{d}_{\sigma 2}) - 2k \left[\int q_{Sn} \sin \frac{n\pi}{2} - \hat{d}_{\sigma 1} \right] = 0 \quad (iv')$$

$$m \ddot{\hat{d}}_{\sigma 2} - k(\hat{d}_{\sigma 1} - \hat{d}_{\sigma 2}) = 0 \quad (v')$$

while (vi) becomes

$$\ddot{q}_{Sn} + \frac{\pi^4 n^4}{\ell^4} \cdot \frac{EI}{\rho A} q_{Sn} + \frac{2}{\rho A \ell} \sin \frac{n\pi}{2} [\sum q_{Sn} \sin \frac{n\pi}{2} - \hat{d}_{\sigma 1}] = Q_{Sn} \quad (vi)$$

D. Simply Supported Beam and Spring Mass System - Nonlinear Springs


(i) Fixed-Base Modes

For substructure σ :

$$\bar{k}_{\sigma} = \hat{k}_{\sigma} = k_2 = k ; \quad \bar{k} = \hat{k} = -k_2 = -k$$

$$\bar{m}_{\sigma} = m_1 = 2m ; \quad \hat{m}_{\sigma} = m_2 = m$$

$$T^c = 1 ; \quad \hat{\phi}_{f\sigma} = 1 ; \quad \mu_{f\sigma} = m_2 = m ; \quad \omega_{f\sigma}^2 = \frac{k_2}{m_2} = \frac{k}{m}$$

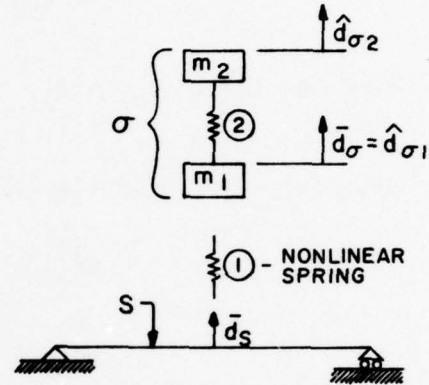


Equation (29) yields: $\bar{d}_{\sigma} = \hat{d}_{\sigma 1} = \bar{\phi}_S q_S - \delta$; $\hat{d}_{\sigma 2} = \bar{d}_{\sigma} + \hat{\phi}_{f\sigma} q_{f\sigma}$

Thus Eqs. (15), (30), (32) and (31) become:

$$\ddot{q}_{Sn} + \frac{\pi^4 n^4}{\ell^4} \cdot \frac{EI}{\rho A} q_{Sn} + \frac{2}{\rho A \ell} \sin \frac{n\pi}{2} \bar{F} = Q_{Sn} \quad (i)$$

$$\bar{F} = 2m\ddot{\bar{d}}_{\sigma} - k(\hat{d}_{\sigma 2} - \hat{d}_{\sigma 1}) \quad (ii)$$

$$m\ddot{\hat{d}}_{\sigma 2} + k(\hat{d}_{\sigma 2} - \hat{d}_{\sigma 1}) = 0 \quad (iii)$$

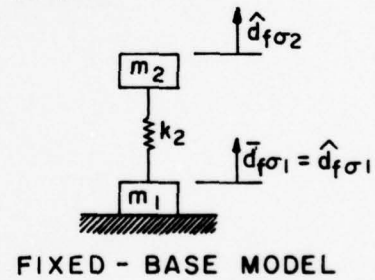

FIXED - BASE MODEL

where $\bar{F} = F(\delta, \delta)$ and


$$\delta = \bar{d}_S - \bar{d}_{\sigma} = \sum q_{Sn} \sin \frac{n\pi}{2} - \hat{d}_{\sigma 1}$$

(ii) Free-Free Component Modes

$$\bar{k}_{\sigma} = \hat{k}_{\sigma} = k_2 = k ; \quad \bar{k} = \hat{k} = -k_2 = -k ;$$

$$\bar{m}_{\sigma} = m_1 = 2m ; \quad \hat{m}_{\sigma} = m_2 = m ;$$

$$\phi_{\sigma} = \begin{bmatrix} 1 & 1 \\ 1 & -2 \end{bmatrix} ; \quad \mu_{\sigma} = \begin{bmatrix} 3 & 0 \\ 0 & 6 \end{bmatrix} m ; \quad \omega_{\sigma}^2 = \begin{bmatrix} 0 & 0 \\ 0 & 3/2 \end{bmatrix} k/m$$

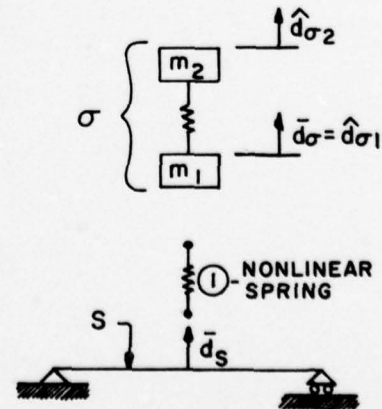

Thus from Eqs. (15) and (36):

$$\ddot{q}_{Sn} + \frac{\pi^4 n^4}{\ell^4} \cdot \frac{EI}{\rho A} q_{Sn} + \frac{2}{\rho A \ell} \sin \frac{n\pi}{2} \bar{F} = Q_{Sn} \quad (\text{iv})$$

$$3m\ddot{q}_{\sigma 1} - \bar{F} = 0 \quad (\text{v})$$

$$6m\ddot{q}_{\sigma 2} + (6m)\frac{3}{2}\frac{k}{m}q_{\sigma 2} - \bar{F} = 0 \quad (\text{vi})$$

From Eq. (33): $\hat{d}_{\sigma 1} = q_{\sigma 1} + q_{\sigma 2}$; $\hat{d}_{\sigma 2} = q_{\sigma 1} - 2q_{\sigma 2}$

Thus (v) - (vi) and 2(v) + (vi) yield

$$m\ddot{\hat{d}}_{\sigma 2} - k(\hat{d}_{\sigma 1} - \hat{d}_{\sigma 2}) = 0 \quad (\text{v})$$

$$2m\ddot{\hat{d}}_{\sigma 1} + k(\hat{d}_{\sigma 1} - \hat{d}_{\sigma 2}) - \bar{F} = 0 \quad (\text{vi})$$

where $\bar{F} = \bar{F}(\delta, \dot{\delta})$ and $\delta = \bar{d}_S - \hat{d}_{\sigma 1} = \int q_{Sn} \sin \frac{n\pi}{2} - \hat{d}_{\sigma 1}$

REFERENCES

- [1] W.C. Hurty, "Dynamic Analysis of Structural Systems Using Component Modes", AIAA J., Vol. 3, No. 4, April 1965, pp. 678-685.
- [2] R.R. Craig and M.C.C. Bampton, "Coupling of Substructures for Dynamic Analysis", AIAA J., Vol. 6, No. 7, July 1968, pp. 1313-1319.
- [3] W.A. Benfield and R.F. Hrudá, "Vibration Analysis of Structures by Component Mode Substitution", Vol. 9, No. 7, July 1971, pp. 1255-1261.
- [4] D. Ranlet, F.L. DiMaggio, H.H. Bleich and M.L. Baron, "Elastic Response of Submerged Shells with Internally Attached Structures to Shock Loading", Computers and Structures, Vol. 7, No. 3, June 1977, pp. 355-364.
- [5] F.L. DiMaggio, "Dynamic Response of a Submerged Elastic Structure with Elastic Structures Attached to It by Inelastic Springs", Contract No. N00014-72-C-0119, Office of Naval Research, Weidlinger Associates, Technical Note, August 1977.

APPENDIX A - ALTERNATE DERIVATION OF DYNAMIC EQUATIONS

In this section we consider the equations of motion for the system as given by Benfield and Huda [3]^{*}, except for the addition of generalized forces:

$$M^c \begin{Bmatrix} \ddot{\xi}_a \\ \ddot{\xi}_{nb} \end{Bmatrix} + K^c \begin{Bmatrix} \xi_a \\ \xi_{nb} \end{Bmatrix} = \begin{Bmatrix} Q_a \\ Q_{nb} \end{Bmatrix} \quad (A-1)$$

When using fixed-base modes for component b and free-free modes for component a, the system modal mass and stiffness matrices are

$$M^c = T_5^{cT} \begin{bmatrix} m_a & 0 \\ 0 & m_b \end{bmatrix} T_5^c ; \quad K^c = T_5^{cT} \begin{bmatrix} k_a & 0 \\ 0 & k_b \end{bmatrix} T_5^c \quad (A-2)$$

and the system coordinate transformation matrix is

$$T_5^c = \begin{bmatrix} \bar{\phi}_a & 0 \\ \hat{\phi}_a & 0 \\ \bar{\phi}_a & 0 \\ T_{cb} \bar{\phi}_a & \hat{\phi}_{nb} \end{bmatrix} \quad (A-3)$$

The generalized forces are

$$Q_a = \hat{\phi}_a^T \hat{f}_a + \bar{\phi}_a^T \bar{f}_b + \bar{\phi}_a^T T_{cb}^T \hat{f}_b \quad (A-4)$$

$$Q_{nb} = \hat{\phi}_{nb}^T \hat{f}_b$$

where \hat{f}_a = known forces acting on main structure (S)

$$f_b = \begin{Bmatrix} \bar{f}_b \\ \hat{f}_b \end{Bmatrix} = \text{known forces acting on substructure } (\sigma)$$

For convenience to those who might wish to refer to the formulation given in Ref. [3], we use the nomenclature that is to be found there. The relationship of the nomenclature used in the body of this report to that used in this section is shown in Table A-1.

^{*}) For simplicity, the superscript c which refers to the fixed-base modes in [3] has been replaced by the subscript n; e.g., $\xi_b^c \rightarrow \xi_{nb}$.

TABLE A-1 NOMENCLATURE

	WA	BH, Ref. [3] ^{*)}
Constrained Base Mode Matrix	T^C	T_{cb}
Displacements	d_S, d_σ	q_a, q_b
Frequencies	$\omega_S, \omega_{f\sigma}, \omega_\sigma$	$\omega_a, \omega_{nb}, \omega_b$
Generalized Coordinates	$q_S, q_{f\sigma}, q_\sigma$	ξ_a, ξ_{nb}, ξ_b
Generalized Forces	$Q_S, Q_{f\sigma}, Q_\sigma$	Q_a, Q_{nb}, Q_b
Main Structure	S	a
Mass and Stiffness Matrices	M_σ, K_σ	m_b, k_b
Modal Mass Matrices	$\mu_S, \mu_{f\sigma}, \mu_\sigma$	M_a, M_{nb}, M_b
Modal Matrices	$\phi_S, \hat{\phi}_{f\sigma}, \phi_\sigma$	$\phi_a, \hat{\phi}_{nb}, \phi_b$
Substructure	σ	b

The equations of the system as given by Eq. (A-1) have, with vanishing right-hand side, been successfully used to obtain the system modes and frequencies, in Ref. [3]. It should be noted, however, that, for complex systems having many dof, the system modal mass and stiffness matrices would require the use of an extensive part of the core of a digital computer. For transient or shock problems this would result in long running times, so that a direct use of Eqs. (A-1) is inadvisable. However, in what follows we will show that these equations can be simplified so that they do indeed yield expressions which are identical to those given in the body of this report.

Defining the following matrices

$$T_{cb}^* = \begin{Bmatrix} I \\ T_{cb} \end{Bmatrix} ; \quad \phi_{nb} = \begin{Bmatrix} 0 \\ \hat{\phi}_{nb} \end{Bmatrix} \quad (A-5)$$

allows us to express Eq. (A-1) in the following form

^{*)} Symbols not appearing in [3] are chosen to be consistent with the notation found there.

$$M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T (T_{cb}^* m_b T_{cb}^*) \bar{\phi}_a \ddot{\xi}_a + \bar{\phi}_a^T T_{cb}^* m_b \phi_{nb} \ddot{\xi}_{nb} \quad (A-6)$$

$$+ \bar{\phi}_a^T (T_{cb}^* k_b T_{cb}^*) \bar{\phi}_a \xi_a + \bar{\phi}_a^T T_{cb}^* k_b \phi_{nb} \xi_{nb} = Q_a$$

$$M_{nb} \ddot{\xi}_{nb} + M_{nb} \omega_{nb}^2 \xi_{nb} + \phi_{nb}^T m_b T_{cb}^* \bar{\phi}_a \ddot{\xi}_a + \phi_{nb}^T k_b T_{cb}^* \bar{\phi}_a \xi_a = Q_{nb} \quad (A-7)$$

As a consequence of the constraint base mode definition in Ref. [3],

$$k_b^T T_{cb}^* \bar{\phi}_a \xi_a = (\hat{k}_b + \hat{k}_b^T T_{cb}) \bar{\phi}_a \xi_a = 0 \quad (A-8)$$

except at the interface coordinates. However, since $\phi_{nb} = 0$ at these coordinates,

$$\phi_{nb}^T k_b^T T_{cb}^* \bar{\phi}_a \xi_a = 0 \quad (A-9)$$

Also, assuming a lumped mass approximation, we have

$$\phi_{nb}^T m_b T_{cb}^* = \hat{\phi}_{nb}^T \hat{m}_b T_{cb} \quad (A-10)$$

Upon substituting the identities of Eqs. (A-9) and (A-10) into Eq. (A-7), we obtain the final form of the equations of motion for the fixed-base (constraint) modes of component b

$$M_{nb} \ddot{\xi}_{nb} + M_{nb} \omega_{nb}^2 \xi_{nb} + \hat{\phi}_{nb}^T \hat{m}_b T_{cb} \bar{\phi}_a \ddot{\xi}_a = Q_{nb} \quad (A-11)$$

Let us now consider all but the first two terms on the left-hand side of Eq. (A-6) and designate them by the symbol LHS. Appealing to the following identities

$$T_{cb}^* m_b T_{cb}^* = \bar{m}_b + T_{cb}^T \hat{m}_b T_{cb}$$

$$T_{cb}^* m_b \phi_{nb} = T_{cb}^T \hat{m}_b \hat{\phi}_{nb}$$

$$T_{cb}^* k_b T_{cb}^* = \bar{k}_b + \hat{k}_b^T T_{cb} + T_{cb}^T \hat{k}_b + T_{cb}^T \hat{k}_b^T T_{cb}$$

$$T_{cb}^* k_b \phi_{nb} = \bar{k}_b^T \hat{\phi}_{nb} + T_{cb}^T \hat{k}_b \hat{\phi}_{nb} \quad (A-12)$$

and rearranging terms, we write

$$\begin{aligned} \text{LHS} = \bar{\phi}_a^T & \left[\bar{m}_b \bar{\phi}_a \ddot{\xi}_a + (\bar{k}_b + \bar{k}_b^T T_{cb}) \bar{\phi}_a \xi_a + T_{cb}^T (\bar{k}_b + \hat{k}_b^T T_{cb}) \bar{\phi}_a \xi_a \right. \\ & \left. + \bar{k}_b \phi_{nb} \xi_{nb} + T_{cb}^T \left\{ \hat{m}_b \hat{\phi}_{nb} \ddot{\xi}_{nb} + \hat{k}_b \hat{\phi}_{nb} \xi_{nb} + \hat{m}_b T_{cb} \bar{\phi}_a \ddot{\xi}_a \right\} \right] \end{aligned} \quad (\text{A-13})$$

Now the equilibrium equations (A-11) can be written as

$$\hat{\phi}_{nb}^T \left\{ \hat{m}_b \hat{\phi}_{nb} \ddot{\xi}_{nb} + \hat{k}_b \hat{\phi}_{nb} \xi_{nb} + \hat{m}_b T_{cb} \bar{\phi}_a \ddot{\xi}_a \right\} = Q_{nb} \quad (\text{A-14})$$

or

$$\hat{m}_b \hat{\phi}_{nb} \ddot{\xi}_{nb} + \hat{k}_b \hat{\phi}_{nb} \xi_{nb} + \hat{m}_b T_{cb} \bar{\phi}_a \ddot{\xi}_a = \hat{f}_b \quad (\text{A-15})$$

The identities of Eqs. (A-8) and (A-15) allow us to rewrite Eq. (A-13) as:

$$\text{LHS} = \bar{\phi}_a^T \left[\bar{m}_b \bar{\phi}_a \ddot{\xi}_a + (\bar{k}_b + \bar{k}_b^T T_{cb}) \bar{\phi}_a \xi_a + \bar{k}_b \hat{\phi}_{nb} \xi_{nb} + T_{cb}^T \hat{f}_b \right] \quad (\text{A-16})$$

Finally, substituting Eq. (A-16) into Eq. (A-6), we obtain

$$\begin{aligned} M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T & \left[\bar{m}_b \bar{\phi}_a \ddot{\xi}_a + (\bar{k}_b + \bar{k}_b^T T_{cb}) \bar{\phi}_a \xi_a + \bar{k}_b \phi_{nb} \xi_{nb} \right] = Q'_a \\ & = \hat{\phi}_a^T \hat{f}_a + \bar{\phi}_a^T \hat{f}_b \end{aligned} \quad (\text{A-17})$$

Equations (A-11) and (A-17), when combined with appropriate initial conditions, are a complete mathematical statement of the problem. They are identical to Eqs. (15), (16) and (20), except for the fact that in the body of the report the forces acting on the substructure were assumed to be zero.

Free-Free Modes of Substructure. It can readily be shown that the equations of motion for the system which appear in Ref. [3], when free-free modes of the substructure are used, can be written as follows:

$$(M_a + \bar{\phi}_a^T \bar{m}_b \bar{\phi}_a) \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T (\bar{k}_b \bar{\phi}_a \xi_a + \bar{k}_b \hat{\phi}_b \xi_b) = Q_a' \quad (A-18)$$

$$\hat{\phi}_b^T \hat{m}_b \hat{\phi}_b \ddot{\xi}_b + \hat{\phi}_b^T \hat{k}_b \bar{\phi}_a \xi_a + \hat{\phi}_b^T \hat{k}_b \hat{\phi}_b \xi_b = Q_b \quad (A-19)$$

where the generalized forces

$$Q_a' = \hat{\phi}_a^T \hat{f}_a + \bar{\phi}_a^T \bar{f}_b \quad (A-20)$$

$$Q_b = \hat{\phi}_b^T \hat{f}_b$$

have been introduced. Noting that

$$\phi_b^T m_b \phi_b = \bar{\phi}_b^T \bar{m}_b \bar{\phi}_b + \hat{\phi}_b^T \hat{m}_b \hat{\phi}_b = M_b$$

$$\phi_b^T k_b \phi_b = \bar{\phi}_b^T (\bar{k}_b \bar{\phi}_b + \bar{k}_b \hat{\phi}_b) + \hat{\phi}_b^T (\hat{k}_b \bar{\phi}_b + \hat{k}_b \hat{\phi}_b) = M_b \omega_b^2 \quad (A-21)$$

and

$$\bar{\phi}_a \xi_a = \bar{\phi}_b \xi_b \quad (A-22)$$

we rewrite Eqs. (A-18) and (A-19) as:

$$M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T \left[\bar{m}_b \bar{\phi}_b \ddot{\xi}_b + \bar{k}_b \bar{\phi}_a \xi_a + \bar{k}_b \hat{\phi}_b \xi_b \right] = Q_a' \quad (A-23)$$

$$M_b \ddot{\xi}_b + M_b \omega_b^2 \xi_b - \bar{\phi}_b^T \left[\bar{m}_b \bar{\phi}_b \ddot{\xi}_b + \bar{k}_b \bar{\phi}_b \xi_b + \bar{k}_b \hat{\phi}_b \xi_b \right] = Q_b \quad (A-24)$$

NONLINEAR MOUNTINGS

When linear elastic system components are attached to one another by nonlinear mountings, it is necessary to isolate those mountings from all of the components of the system. Thus, only the forces transmitted by them, which are, in general, functions of the relative displacements and velocities, enter into the analysis.

Fixed-Base (Constraint) Modes. The component displacements are expressed as

$$\begin{Bmatrix} \bar{q}_a \\ \hat{q}_a \\ \bar{q}_b \\ \hat{q}_b \end{Bmatrix} = T_5^c \begin{Bmatrix} \xi_a \\ \xi_{nb} \end{Bmatrix} - \Delta^c \quad (A-25)$$

where

$$\Delta^c = \begin{Bmatrix} 0 \\ 0 \\ \delta \\ T_{cb} \delta \end{Bmatrix} \quad (A-26)$$

and

$$\delta = \bar{q}_a - \bar{q}_b \quad (A-27)$$

As a consequence of Eq. (A-25), the potential energy of components a and b can be written as

$$\begin{aligned} PE_{ab} &= \frac{1}{2} \begin{bmatrix} q_a^T & q_b^T \end{bmatrix} \begin{bmatrix} k_a & 0 \\ 0 & k_b \end{bmatrix} \begin{Bmatrix} q_a \\ q_b \end{Bmatrix} \\ &= \frac{1}{2} \begin{bmatrix} \xi_a^T & \xi_{nb}^T \end{bmatrix} K^c \begin{Bmatrix} \xi_a \\ \xi_{nb} \end{Bmatrix} + \frac{1}{2} \Delta^{cT} \begin{bmatrix} k_a & 0 \\ 0 & k_b \end{bmatrix} \Delta^c \\ &\quad - \Delta^{cT} \begin{bmatrix} k_a & 0 \\ 0 & k_b \end{bmatrix} T_5^c \begin{Bmatrix} \xi_a \\ \xi_{nb} \end{Bmatrix} \end{aligned} \quad (A-28)$$

Similarly, we can express the kinetic energy as

$$KE_{ab} = \frac{1}{2} \begin{bmatrix} \dot{\xi}_a^T & \dot{\xi}_{nb}^T \end{bmatrix} M^c \begin{Bmatrix} \xi_a \\ \xi_{nb} \end{Bmatrix} + \frac{1}{2} \dot{\Delta}^c T \begin{bmatrix} m_a & 0 \\ 0 & m_b \end{bmatrix} \dot{\Delta}^c - \dot{\Delta}^c T \begin{bmatrix} m_a & 0 \\ 0 & m_b \end{bmatrix} T_5^c \begin{Bmatrix} \dot{\xi}_a \\ \dot{\xi}_{nb} \end{Bmatrix} \quad (A-29)$$

For simplicity, let us assume that components a and b are attached by mountings whose properties are characterized by nonlinear elastic and linear viscous elements. We express the potential energy of the mountings as

$$(PE)_M = V_M(\delta) \quad (A-30)$$

and the viscous dissipation function as

$$D_M = D_M(\dot{\delta}) \quad (A-31)$$

Using the generalized form of Lagrange's equations, and noting that the generalized coordinates are ξ_a, ξ_{nb} , and δ , we readily obtain the following system of equations

$$M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T \left[\bar{m}_b (\bar{\phi}_a \ddot{\xi}_a - \ddot{\delta}) + (\bar{k}_b + \bar{k}_b^T T_{cb}) (\bar{\phi}_a \xi_a - \delta) + \bar{k}_b \hat{\phi}_{nb} \xi_{nb} \right] = Q_a \quad (A-32)$$

$$M_{nb} \ddot{\xi}_{nb} + M_{nb} \omega_{nb}^2 \xi_{nb} + \hat{\phi}_{nb}^T \bar{m}_b T_{cb} (\bar{\phi}_a \ddot{\xi}_a - \ddot{\delta}) = Q_{nb} \quad (A-33)$$

$$\bar{m}_b (\bar{\phi}_a \ddot{\xi}_a - \ddot{\delta}) + (\bar{k}_b + \bar{k}_b^T T_{cb}) (\bar{\phi}_a \xi_a - \delta) + \bar{k}_b \hat{\phi}_{nb} \xi_{nb} = \frac{\partial V_M}{\partial \delta} + \frac{\partial D_M}{\partial \dot{\delta}} - Q_\delta \quad (A-34)$$

where Q_a, Q_{nb} are defined in Eq. (A-4)

and

$$Q_\delta = -\bar{f}_b - T_{cb} \hat{f}_b \quad (A-35)$$

Note that Eq. (A-34) is an expression for the forces transmitted by the

attachments. For a more general material we replace $(\frac{\partial V_M}{\partial \delta} + \frac{\partial D_M}{\partial \dot{\delta}})$ by $F(\delta, \dot{\delta})$, the forces exerted by the attachments on component b.

Free-Free Component Modes. When using the free-free component modes, we express the displacements as

$$\begin{Bmatrix} \bar{q}_a \\ \hat{q}_a \\ \bar{q}_b \\ \hat{q}_b \end{Bmatrix} = \begin{bmatrix} \bar{\phi}_a & 0 \\ \hat{\phi}_a & 0 \\ \bar{\phi}_a & 0 \\ 0 & \hat{\phi}_b \end{bmatrix} \begin{Bmatrix} \xi_a \\ \xi_b \end{Bmatrix} - \Delta \quad (A-36)$$

where

$$\Delta = \begin{Bmatrix} 0 \\ 0 \\ \delta \\ 0 \end{Bmatrix} \quad (A-37)$$

Following the same procedure as was previously described, we readily obtain the following set of equations

$$M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T \left[\bar{m}_b \bar{\phi}_b \ddot{\xi}_b + (\bar{k}_b \bar{\phi}_b + \bar{\hat{k}}_b \hat{\phi}_b) \xi_b \right] = Q_a' \quad (A-38)$$

$$M_b \ddot{\xi}_b + M_b \omega_b^2 \xi_b - \bar{\phi}_b^T \left[\bar{m}_b \bar{\phi}_b \ddot{\xi}_b + (\bar{k}_b \bar{\phi}_b + \bar{\hat{k}}_b \hat{\phi}_b) \xi_b \right] = Q_b \quad (A-39)$$

$$\bar{m}_b \bar{\phi}_b \ddot{\xi}_b + \bar{k}_b \bar{\phi}_b \xi_b + \bar{\hat{k}}_b \hat{\phi}_b \xi_b = F(\delta, \dot{\delta}) - Q_\delta \quad (A-40)$$

where

$$Q_a' = \hat{\phi}_a^T \hat{f}_a + \bar{\phi}_a^T \bar{f}_b \quad (A-41)$$

$$Q_b = \hat{\phi}_b^T \hat{f}_b$$

$$Q_\delta = -\bar{f}_b$$

Substituting Eq. (A-40) into Eqs. (A-38, 39) yields:

$$M_a \ddot{\xi}_a + M_a \omega_a^2 \xi_a + \bar{\phi}_a^T F(\delta, \dot{\delta}) = \bar{\phi}_a^T Q_G + Q'_a = \hat{\phi}_a^T \hat{f}_a \quad (A-42)$$

$$M_b \ddot{\xi}_b + M_b \omega_b^2 \xi_b - \bar{\phi}_b^T F(\delta, \dot{\delta}) = \bar{\phi}_b^T \bar{f}_b + \hat{\phi}_b^T \hat{f}_b \quad (A-43)$$

where

$$\delta = \bar{\phi}_a \xi_a - \bar{\phi}_b \xi_b \quad (A-44)$$

DISTRIBUTION MAILING LIST

PAGE 1

ASSISTANT TO THE SECRETARY DEFENSE
ATOMIC ENERGY
WASHINGTON, DC 20301
ATTN DONALD COTTER

DIRECTOR
DEFENSE ADVANCED RESEARCH PROJECT AGENCY
ARCHITECT BUILDING
1400 WILSON BLVD.
ARLINGTON, VA 22209
ATTN A. TACHMINDJI
ATTN STO KENT KRESA
ATTN TECHNICAL LIBRARY
ATTN R. CHAPMAN

DEFENSE DOCUMENTATION CENTER
CAMERON STATION
ALEXANDRIA, VA 22314
ATTN TECHNICAL LIBRARY

(3 COPIES)

DIRECTOR
DEFENSE INTELLIGENCE AGENCY
WASHINGTON, DC 20301
ATTN DI-7D E. OFARRELL
ATTN DI-7E
ATTN DT-1C J. VERONA
ATTN. DT-2 (WEAPONS&SYSTEMS DIVISION)
ATTN TECHNICAL LIBRARY

DEFENSE NUCLEAR AGENCY
WASHINGTON, DC 20305
ATTN STTL TECHNICAL LIBRARY
ATTN STST ARCHIVES
ATTN DDST
ATTN SPSS

(2 COPIES)

(2 COPIES)

PAGE 2

CHAIRMAN
DEPARTMENT OF DEFENSE EXPLOSION
SAFETY BOARD
RM-GB270, FORRESTAL BUILDING
WASHINGTON DC 20301
ATTN DD/S+SS

DIRECTOR OF DEFENSE RESEARCH&ENGINEERING
WASHINGTON DC 20301
ATTN AD/SW
ATTN DD/TWP
ATTN DD/S+SS
ATTN AD/NP

COMMANDER
FIELD COMMAND
DEFENSE NUCLEAR AGENCY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117
ATTN FCTA
ATTN FCTA-D

INTERSERVICE NUCLEAR WEAPONS SCHOOL
KIRTLAND AIR FORCE BASE
ALBUQUERQUE, NM 87117
ATTN TECH LIB

DIRECTOR
OFFUTT AIR FORCE BASE
JOINT STRATEGIC TARGET
PLANNING STAFF JCS
OMAHA, NB 68113
ATTN STINFO LIBRARY

WEAPONS SYSTEMS EVALUATION GROUP
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN DOC CON

PAGE 3

CHIEF OF RESEARCH, DEVELOPMENT AND
ACQUISITION
DEPARTMENT OF THE ARMY
WASHINGTON DC 20310
ATTN TECHNICAL LIBRARY
ATTN DAMA-CSM-N LTC E. DEBOESER JR

COMMANDER
HARRY DIAMOND LABORATORIES
WASHINGTON, DC 20438
ATTN AMXDO-NP
ATTN AMXDO-TI TECH LIB

DIRECTOR
U S ARMY BALLISTIC RESEARCH LABORATORIES
ABERDEEN PROVING GROUND, MD 21005
ATTN TECH LIB E. BAICY

COMMANDER
U S ARMY COMM COMMAND
FORT HUACHUCA, AZ 85613
ATTN TECHNICAL LIBRARY

COMMANDER
U. S. ARMY MATERIAL & MECHANICS
RESEARCH CENTER
WATERTOWN, MA 02172
ATTN R SHEA

COMMANDER
U S ARMY NUCLEAR AGENCY
FORT BLISS, TX 79916
ATTN TECH LIB

PAGE 4

COMMANDER
U S ARMY WEAPONS COMMAND
ROCK ISLAND ARSENAL
ROCK ISLAND, IL 61201
ATTN TECHNICAL LIBRARY

CHIEF OF NAVAL MATERIAL
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20360
ATTN MAT 0323

CHIEF OF NAVAL OPERATIONS
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20350
ATTN OP 03FG
ATTN OP 985F

CHIEF OF NAVAL RESEARCH
DEPARTMENT OF THE NAVY
ARLINGTON VA 22217
ATTN N PERRONE CD 474
ATTN TECHNICAL LIBRARY

(5 COPIES)

OFFICER IN CHARGE
CIVIL ENGINEERING LABORATORIES
NAVAL CONSTRUCTION BATTALION CENTER
PORT HUENEME CA 93041
ATTN R ODELLO
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
NAVAL ELECTRONIC SYSTEMS COMMAND HQS
WASHINGTON, DC 20360
ATTN PME 117-21A

PAGE 5

COMMANDER
NAVAL FACILITIES ENGINEERING COMMAND
HEADQUARTERS
WASHINGTON, DC 20390
ATTN TECHNICAL LIBRARY

SUPERINTENDENT
NAVAL POSTGRADUATE SCHOOL
MONTEREY CA 93940
ATTN CODE 2124 TECH RPTS LIBRARIAN

DIRECTOR
NAVAL RESEARCH LABRATORY
WASHINGTON DC 20375
ATTN CODE 2027 TECHNICAL LIBRARY
ATTN CODE 8440 F ROSENTHAL
ATTN CODE 8403A G OHARA
ATTN CODE 8442 H HUANG

NKF ENGINEERING ASSOCIATES, INC.
8720 GEORGIA AVENUE
SUITE 803
SILVER SPRING, MD 20910
ATTN. DR. ROBERT O. BELSHEIM

COMMANDER
NAVAL SEA SYSTEMS COMMAND
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362
ATTN ORD - 91313 LIB
ATTN CODE 03511 C POHLER

NAVAL SHIP RESEARCH & DEVELOPMENT CENTER
UNDERSEA EXPLOSIONS RESEARCH DIVISION
PORTSMOUTH VA 23709
ATTN E PALMER
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL SHIP ENGINEERING CENTER
DEPARTMENT OF THE NAVY
WASHINGTON, DC 20362
ATTN NSEC 6120D
ATTN NSEC 6110.01
ATTN NSEC 6105G
ATTN NSEC 6105
ATTN 6105C1
ATTN TECHNICAL LIBRARY

COMMANDER
DAVID W. TAYLOR
NAVAL SHIP RESEARCH & DEVELOPMENT CENTER
BETHESDA MD 20034
ATTN CODE 17 WW MURRAY
ATTN CODE 142-3 LIBRARY
ATTN CODE 174 R SHORT
ATTN CODE 11
ATTN CODE 2740 Y WANG
ATTN CODE 1962
ATTN CODE 1903
ATTN CODE 1731C
ATTN CODE 1171
ATTN CODE 19

COMMANDER
NAVAL SURFACE WEAPONS CENTER
WHITE OAK
SILVER SPRING MD 20910
ATTN CODE 241 J PETES
ATTN CODE 1224 NAVY NUC PRGMS OFF
ATTN CODE 730 TECH LIB
ATTN CODE 240 H SNAY
ATTN CODE 243 G YOUNG

COMMANDER
NAVAL SURFACE WEAPONS CENTER
DAHLGREN LABORATORY
DAHLGREN VA 22448
ATTN TECHNICAL LIBRARY

PAGE 7

COMMANDER
NAVAL UNDERSEA CENTER
SAN DIEGO, CA 92152
ATTN TECHNICAL LIBRARY

COMMANDER
NAVAL WEAPONS CENTER
CHINA LAKE CA 93555
ATTN CODE 533 TECH LIB

COMMANDING OFFICER
NAVAL WEAPONS SUPPORT CENTER
CRANE, INDIANA 47522
ATTN DR. H.A. SABBAGH, CODE 7055

COMMANDING OFFICER
NAVAL WEAPONS EVALUATION FACILITY
KIRTLAND AIR FORCE BASE
ALBUQUERQUE NM 87117
ATTN TECHNICAL LIBRARY

DIRECTOR
STRATEGIC SYSTEMS PROJECTS OFFICE
DEPARTMENT OF THE NAVY
WASHINGTON DC 20376
ATTN NSP-272
ATTN NSP-43 TECH LIBRARY

AIR FORCE CAMBRIDGE RESEARCH
LABORATORIES, AFSC
L.G. HANSCOM FIELD
BEDFORD MA 01730
ATTN SUOL AFCRL RSCH LIB

HEADQUARTERS
AIR FORCE SYSTEMS COMMAND
ANDREWS AIR FORCE BASE
WASHINGTON DC 20331
ATTN TECHNICAL LIBRARY

COMMANDER
ARMAMENT DEVELOPMENT&TEST CENTER
ELGIN AFB FL 32542
ATTN TECHNICAL LIBRARY

LOS ALAMOS SCIENTIFIC LABORATORY
P O BOX 1663
LOS ALAMOS NM 87544
ATTN DOC CONTROL FOR REPORTS LIBRARY

LIVERMORE LABORATORIES
P O BOX 969
LIVERMORE CA 94550
ATTN DOC CON FOR TECH LIBRARY

SANDIA LABORATORIES
P.O. BOX 5800
ALBUQUERQUE NM 87115
ATTN DOC CON FOR 3141 SANDIA RPT COLL

U. S. ENERGY RESEARCH&DEVELOPMENT ADMIN.
DIVISION OF HEADQUARTERS SERVICES
LIBRARY BRANCH G-043
WASHINGTON DC 20545
ATTN DOC CONTROL FOR CLASS TECH LIB

LAWRENCE LIVERMORE LABORATORIES
P.O. BOX 808
LIVERMORE CA 94550
ATTN TECHNICAL LIBRARY

AGBABIAN ASSOCIATES
250 NORTH NASH STREET
EL SUGONDO CA 90245
ATTN M AGBABIAN

BATTELLE MEMORIAL INSTITUTE
505 KING AVENUE
COLUMBUS OH 43201
ATTN TECHNICAL LIBRARY

BELL TELEPHONE LABORATORIES INC.
MOUNTAIN AVE
MURRAY HILL NJ 07974
ATTN TECHNICAL REPORT CENTER

BOEING COMPANY
P.O. BOX 3707
SEATTLE WA 98124
ATTN AEROSPACE LABORATORY

CAMBRIDGE ACOUSTICAL ASSOCIATES
1033 MASSACHUSETTS AVENUE
CAMBRIDGE MA 02138
ATTN M JUNGER

CIVIL / NUCLEAR SYSTEMS CORPORATION
1200 UNIVERSITY N. F.
ALBUQUERQUE NM 87102
ATTN T DUFFY

ELECTRIC BOAT DIVISION
GENERAL DYNAMICS CORPORATION
GROTON CN 06340
ATTN L. CHEN

GENERAL ELECTRIC COMPANY
TEMPO-CENTER FOR ADVANCED STUDIES
816 STATE STREET (P.O. DRAWER QQ)
SANTA BARBARA CA 93102
ATTN DASIAC

ITT RESEARCH INSTITUTE
10 WEST 35TH STREET
CHICAGO IL 60616
ATTN TECHNICAL LIBRARY

INSTITUTE FOR DEFENSE ANALYSIS
400 ARMY NAVY DRIVE
ARLINGTON VA 22202
ATTN IDA LIBRARIAN R SMITH

J.L. MERRITT
CONSULTING AND SPECIAL ENGINEERING
SERVICES, INC.
P.O. BOX 1206
REDLANDS CA 92373
ATTN TECHNICAL LIBRARY

KAMAN AVIDYNE
DIV OF KAMAN SCIENCES CORPORATION
83 SECOND AVENUE
NW INDUSTRIAL PARK
BURLINGTON MA 01803
ATTN E CRISCIONE
ATTN TECHNICAL LIBRARY
ATTN G ZARTARIAN

KAMAN SCIENCES CORPORATION
P.O. BOX 7463
COLORADO SPRINGS CO 80933
ATTN TECHNICAL LIBRARY

LOCKHEED MISSILES AND SPACE COMPANY
3251 HANOVER STREET
PALO ALTO CA 94304
ATTN TECH INFO CTR D/COLL
ATTN T GEERS D/52-33 BLDG 205

NATHAN M. NEWMARK
CONSULTING ENGINEERING SERVICES
1114 CIVIL ENGINEERING BUILDING
URBANA IL 61801
ATTN N NEWMARK

POLYTECHNIC INSTITUTE OF NEW YORK
DEPARTMENT OF MECHANICAL AND
AEROSPACE ENGINEERING
333 JAY STREET
BROOKLYN NY 11201
ATTN J KLOSNER

R+D ASSOCIATES
P. O. BOX 9695
MARINA DEL RAY, CA 90291
ATTN TECHNICAL LIBRARY

STANFORD RESEARCH INSTITUTE
333 RAVENSWOOD AVENUE
MENLO PARK CA 94025
ATTN SRT LIB ROOM G021
ATTN B GASTEN
ATTN G ABRAHAMSON

TETRA TECH INC.
630 N ROSEMEAD BLVD.
PASADENA CA 91107
ATTN LI-SAN HWANG
ATTN TECH LIB

PAGE 12

THE BDM CORPORATION
1920 ALINE AVENUE
VIENNA VA 22180
ATTN TECHNICAL LIBRARY

UNIVERSITY OF MARYLAND
DEPARTMENT OF CIVIL ENGINEERING
COLLEGE PARK MD 20742
ATTN B BERGER

URS RESEARCH COMPANY
155 BOVET ROAD
SAN MATEO CA 94402
ATTN TECHNICAL LIBRARY

ASSISTANT CHIEF FOR TECHNOLOGY
OFFICE OF NAVAL RESEARCH
ARLINGTON, VA 22217
ATTN CODE 200

NAVAL UNDERWATER SYSTEMS COMMAND
NEWPORT, RI 02840
ATTN DR. AZRIEL HARARI/3B 311

TELEDYNE BROWN ENGINEERING
MAIL STOP 44
300 SPARKMAN DRIVE
RESEARCH PARK
HUNTSVILLE, AL 35807
ATTN DR. MANU PATEL

PAGE 13

DIRECTOR
U.S. ARMY WATERWAYS EXPERIMENT STATION
P.O. BOX 631
VICKSBURG MS 39180
ATTN J STRANGE
ATTN W FLATHAU
ATTN TECH LIB (UNCL ONLY)

AIR FORCE INSTITUTE OF TECHNOLOGY, AU
WRIGHT PATTERSON AFB, OH 45433
ATTN LIB AFIT BLDG 640 AREA B(UNCL ONLY)

WEIDLINGER ASSOCIATES
3000 SAND HILL ROAD
BUILDING 4 SUITE 245
MENLO PARK CA 94025
ATTN J. ISENBERG

WEIDLINGER ASSOCIATES
110 EAST 59TH STREET
NEW YORK, NY 10022
ATTN DR. M. L. BARON

(5 COPIES)

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER Technical Report No. 22	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Transient Response of Structures by Use of Component Modes		5. TYPE OF REPORT & PERIOD COVERED Technical Report
		6. PERFORMING ORG. REPORT NUMBER Technical Report No. 22
7. AUTHOR(s) J.M. Klosner and D. Ranlet		8. CONTRACT OR GRANT NUMBER(s) N00014-72-C-0119
9. PERFORMING ORGANIZATION NAME AND ADDRESS Weidlinger Associates 110 East 59th Street New York, New York 10022		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 61153N44023-03 064464
11. CONTROLLING OFFICE NAME AND ADDRESS Office of Naval Research 800 North Quincy Street Arlington, Virginia		12. REPORT DATE February 1978
		13. NUMBER OF PAGES 28
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) <div style="display: flex; justify-content: space-between;"> <div> Transient Response Substructuring Internal Structure </div> <div> Component Modes Shell Response </div> </div>		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) <p>A general method is presented for obtaining the dynamic equations of an elastic structure to which elastic and/or nonlinear substructural elements are attached.</p>		

DD FORM 1473 1 JAN 73

EDITION OF 1 NOV 65 IS OBSOLETE
S/N 0102-014-6601

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)